


# ELECTRONIC PRESSURE AND TEMPERATURE SWITCHES

The Preferred Choice for Plant Instrumentation Upgrades

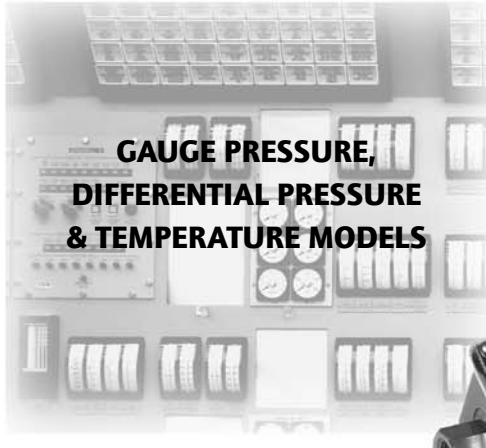

## FEATURES

- Large Process Display
- 100% Programmable Set Point and deadband
- All Solid-State – no moving parts
- Plugged Port detection
- Patented Electronic IAW® self-diagnostics
- 2-Wire and loop-powered models for PLC & DCS inputs
- High-power models for local switching applications
- cULus and ATEX Certified for hazardous location service



## OVERVIEW

### MODELS 2W2D & 2W3A - PLC & DCS DISCRETE INPUT SWITCHING

The One Series 2-Wire derives its operating power from the discrete input to which it is connected. Unlike a transmitter, it will do this on a digital channel, not a more expensive analog channel. In most applications this will be the input of a Programmable Logic Controller (PLC), a Distributed Control System (DCS) or an interposing relay. Whether it's internal switch is open or closed, the One Series 2-Wire obtains a minute but sufficient amount of power to operate continuously - directly from the discrete input. No separate power wiring is required. The PLC/DCS input interprets the One Series 2-Wire connection as if it were mechanical contacts - JUST LIKE A SWITCH!

### MODEL 2WLP - DIGITAL GAUGE, LOOP-POWERED TRANSMITTER AND SWITCH IN ONE


This model derives its power from a 4-20 mA loop, rather than from a discrete PLC input, and provides isolated analog and solid-state switch outputs. The 4-20 mA analog signal changes proportionately with the changes in the process while the switch can trigger an alarm or initiate a shutdown when a programmable threshold is reached. Because the switch is loop-powered, there are no extra wiring requirements; 2 wires go out to the load for local or remote switching while 2 wires send the 4-20 mA signal back to the PLC for process trending. This model potentially replaces a switch, gauge and transmitter with one instrument, using only one process tap!

### MODEL 4W3A - HIGH-POWER LOCAL SWITCHING

Incorporating an integral solid-state relay (SSR), this model directly handles 10 amperes and up to 280 VAC, providing a local switching capability for controlling large loads directly. Switch decisions are made within 60 milliseconds, making this One Series ideal for pump and compressor protection applications. And the IAW<sup>®</sup> (I Am Working) watchdog self-diagnostics continuously monitor the health and status of the switch, providing piece of mind in critical applications. No PLC or DCS is required since 115 VAC power is provided separately.

### MODEL 8W2D - TWO INDEPENDENT SOLID-STATE RELAYS + 4-20 mA

Each solid-state relay in this 24 VDC-powered model has an independent set point and deadband to provide precise control for two local or remote loads. The relays can handle up to 250 VAC at 1.5 A for local switching applications. Alternatively, a 0-140 VAC *and* VDC relay can be substituted for one or both relays for switching PLC or DCS inputs. A field-scalable 4-20 mA analog signal provides continuous process trending information. Now there is an excellent choice for replacing a switch, a gauge and a transmitter - all with one instrument and one process connection. Improve Reliability. Contain Costs.

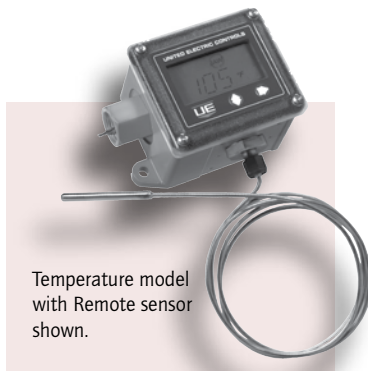

Temperature model with Remote sensor shown.

- Patented IAW<sup>®</sup> self diagnostics assures the One Series will switch when needed with local and remote indication
- No regular calibration required; extended service life
- Field adjustments for offset and span
- Digital accuracy and 0.1% repeatability over a wide temperature range
- 3-year warranty

## KEY FEATURES

- **Keypad display** Large, easy-to-read display, showing the process condition and the status of the switch. Set point, deadband and minimum/maximum process values can be easily accessed from the keypad while in operation. Settings are protected from unauthorized access via specific keypad sequencing. All values are stored in non-volatile memory.
- **IAW® (I AM WORKING) self-diagnostics** All One Series models contain the patented IAW® self-diagnostics feature, giving the user peace-of-mind that the instrument is operating properly and will switch when required. Locally, animated IAW® arrows and display messages inform the operator of problems detected. Remotely, the switch and 4-20 mA outputs can be configured to alert the control room operator of the IAW® status.
- **2-Wire design** (2W2D & 2W3A models) The One Series 2-Wire innovative design allows the unit to power and switch using the same two wires. The electronic switch's low power requirements allow the One Series 2-Wire to operate using residual current from the PLC discrete input.
- **Easy upgrades** The One Series 2-Wire is a direct drop-in replacement for a switch that is attached to a PLC, using the same two wires. No other wiring is necessary, providing easy and cost-effective field instrument upgrades.

### CERTIFIED FOR DIVISION 2 HAZARDOUS LOCATIONS

- **Certified to Enclosure Type 4X/IP66** Corrosion resistant enclosure is epoxy-coated aluminum with a gasketed, polycarbonate faceplate to withstand harsh and dirty environments, and plant wash-downs. All sensors and electrical conduits are stainless steel welded construction.
- **Agency Certifications: cULus, ATEX, and CE approvals** The One Series has been rigorously tested by independent agencies to ensure adherence to required industrial specifications, manufacturing practices and quality. Each One Series is backed by a limited 3-year warranty. United Electric Controls is an ISO 9001 certified manufacturing company.

- **Intrinsically safe** (with IS barrier, 2W2D model only) The One Series 2-Wire is approved for use in intrinsically-safe (Class I, Div. 1) applications. A galvanically-isolated barrier (option M036, part no. 62169-29) is custom-designed for use with the One Series. Without the safety barrier, all One Series models are approved for Division 2 Hazardous locations.

## ADVANCED FEATURES

- **Recording of minimum and maximum process readings** The One Series can read and record the minimum and maximum process "extremes". The values remain in non-volatile memory until they are manually reset, using the keypad.
- **Offset and Span** adjustments for calibrating to user instrument and system requirements.
- **Plug Port detection** One Series IAW® includes an algorithm for detecting a plugged or isolated pressure sensor port, where the medium is viscous or contains particulate matter. When Plugged Port detection is enabled, the One Series display will alert the user locally and remotely, using its IAW® indications.
- **Latching or automatic reset** The switch output can be field-configured for either automatic reset or latching. The latching feature provides a "manual reset" requirement, making it necessary for the operator to intervene and determine why the alarm occurred.
- **Delay (nuisance trip) filtering** Certain pressure spikes and transients can cause nuisance trips and shut down a process unnecessarily. Delay filtering can be enabled to filter out the process variation. With this feature disabled, the One Series reacts within 60 mS to all process variations.

## APPLICATIONS

For alarm and shutdown switching applications, there is no better choice than the One Series family of electronic switches from United Electric Controls. Measuring gauge pressure, differential pressure or temperature, the extremely rugged and reliable One Series takes all of the guess-work out of monitoring process variables to prevent injury, loss and downtime. With its large digital display, fully adjustable deadband, and 100% solid-state design, the One Series is the obvious choice for plant upgrades and new construction projects. A built-in microprocessor provides digital repeatability and intelligent self-diagnostics, providing an extremely reliable and smart protection device that provides plant operators with the notion - this product will work when you need it to!

### • Pump and Compressor Applications

With no moving parts and full adjustability, the highly-repeatable temperature compensated One Series makes an ideal pump staging switch. Adjust the set point to turn on the pump; adjust the deadband (switch hysteresis) to turn it off - providing accurate single loop control for the rotating equipment. The One Series reacts within 60 milliseconds to provide a rapid shutdown, preventing damage to expensive pumps and compressors.

### • Lube Oil Monitoring

Fitted with an RTD temperature sensor, the One Series can measure the temperature of critical lubrication oil, providing emergency shutdowns or predictive maintenance data. The 4-20 mA output provides temperature trending data while the integral solid-state relay performs a local shutdown and/or alarm.

### • Hydraulic Oil Pressure

For harsh applications where varying temperature, erratic pressure and high-vibration are present, the One Series excels. Epoxy encapsulation and conformal coatings protect the solid-state electronics assemblies and allow the One Series to withstand the rigors of extreme oil pressures and high switching rates common with hydraulic power units. Atomized oil has no effect on the One Series operation or Type 4X enclosure.

### • Filter Monitoring

Unique to the One Series electronic switches, differential pressure measurements can be made in hazardous locations with ranges as low as inches of water column and up to 200 PSID. By monitoring the flow through a filter, the One Series can predict and detect when a filter needs to be replaced or back-washed, automatically starting the sequence. All One Series sensors feature 316L stainless steel wetted parts for wide chemical compatibility. No elastomers; no ceramics.


- Oil refineries
- Food & beverage processing
- Pharmaceuticals

- Power plants
- Water treatment facilities
- Chemical processing

- Shipboard control systems
- Oil & gas pipelines
- Compressor stations

### • Safety Instrumented Systems

UE contracted with Exida LLC to provide a Failure Modes, Effects and Diagnostic Analysis (FMEDA) report for the One Series electronic switch product line. The data is intended to aid project engineers involved in designing Safety Instrumented Systems (SIS). The One Series is suitable for Safety Integrity Level (SIL) 1 applications and has a 50-year life expectancy. For additional information or a copy of the FMEDA report, please contact United Electric Controls.

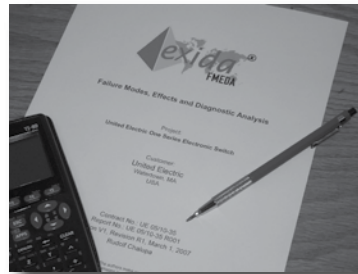

### • Plant Upgrades

With solid-state precision, self-diagnostics and minimal power requirements, the One Series is a cost-effective solution for increasing plant reliability for critical on/off alarm and shutdown protection. The One Series 2-Wire connects to a control system utilizing the existing wiring, making rewiring unnecessary. With a reaction time of 60 milliseconds or less and a sensible price, the One Series provides 5X faster response time at half the installed cost of a typical transmitter with a digital protocol!

The One Series Vs. Transmitters

|  | One Series | Process Transmitters |
|--|------------|----------------------|
| Solid State & Self-diagnostic:                   | Yes        | Yes                  |
| Repeatability:                                   | 0.1%       | 0.1%                 |
| Response Time:                                   | 60 mS      | 300 mS               |
| Local Readout, Programmability & Switching:      | Yes        | No                   |
| Max/Min Memory, Plug Port, Delay & Manual Reset: | Yes        | No                   |
| Cost:  | X          | 2.5X                 |

### • Proven in Use

Since 1998, the One Series has set the standard for electronic switch design. With an installed-base of literally tens of thousands of UE electronic switches in various and diverse applications worldwide, the One Series is field-proven in many process industries. Contact UE for additional information or for help with your application.

## TECHNOLOGY

### DIGITAL DESIGN

The One Series is a 100% solid-state microprocessor-based pressure or temperature instrument with an extremely low power design. A digital display gives real-time process and diagnostic information and simplifies programming. Because of its unique interface and low power design, the One Series 2-Wire can be attached to a PLC, DCS, or common relay coils, using only 2 wires.



### OPERATION

The One Series uses a stainless steel pressure transducer or temperature sensor to provide input to a micro-controller for making switch decisions. Programming and interrogating the One Series is done through two buttons on the faceplate. A sequence of key strokes for programming provides tamper resistance.

- The input is filtered, as programmed by the user.
- The value is compared to the programmed set point and deadband information.
- The output state is changed if required.
- The digital display is updated.
- The value is recorded, with a new maximum or minimum reading, for later interrogation by the user.
- The Plugged Port feature monitors the process to detect a clogged sensor.

### IAW® (I AM WORKING) SELF-DIAGNOSTICS

The One Series contains UE's patented IAW® algorithm, providing both local and remote assurance of switch health, switch status, and fault conditions. The switch output can be configured to operate in either the IAW® (remote diagnostic mode) or simple on-off manner. When programmed for IAW® operation, the switch has three possible states. Various switch operating modes are shown in the table below.

| Switch Mode            | Display   | Switch States | Switch Action  |
|------------------------|-----------|---------------|--|
| Open on Rise (Default) | OPEN RISE | 2             | Normally closes, opens as variable increases to set point, opens on fault  |
| Close on Rise          | CLOS RISE | 2             | Normally open, closes as variable increases to set point, opens on fault   |
| Open on Fall           | OPEN FALL | 2             | Normally closes, opens as variable decreases to set point, opens on fault  |
| Close on Fall          | CLOS FALL | 2             | Normally open, closes as variable increases to set point, opens on fault   |
| Pulse on Rise (IAW®)*  | PULS RISE | 3             | Normally closed, pulses as variable increases to set point, opens on fault |
| Pulse on Fall (IAW®)*  | PULS FALL | 3             | Normally open, pulses as variable decreases to set point, opens on fault   |

\* Not available on 8W2D models

### PLUGGED PORT DETECTION

The Plugged Port Detection feature, if enabled by the user, monitors the changes in the process variable over time. If there is sufficient fluctuation in the process variable, no problem is reported. If the process variable does not change (flattens) over the specified time period, a Plugged Port condition will be displayed. Both the amount of variation and the period of time to be monitored are user-programmable.

## SPECIFICATIONS

|   |   |
|---|---|
| <b>Power input:</b>                         | <p>Model 2W2D - 12-30 VDC @ 750 <math>\mu</math>A derived from a PLC or DCS discrete input, or suitable load</p> <p>Model 2W3A - 90-130 VAC or VDC @ 1 mA derived from a PLC or DCS discrete input, or suitable load</p> <p>Model 2WLP - 10-36 VDC @ 4-20 mA loop-powered</p> <p>Model 4W3A - 90-130 VAC @ 15 mA external power supply</p> <p>Model 8W2D - 10-30 VDC @ 30 mA external power supply</p>  |
| <b>Accuracy:</b>                            | 0.5% of full range span, under nominal conditions   |
| <b>Repeatability:</b>                       | 0.1% of full range span   |
| <b>Ambient operating temperature range:</b> | <p>Models 2W2D and 2W3A: -40 to 185°F (-40 to 85°C)</p> <p>Model 2WLP and 8W2D: -40 to 176°F (-40 to 80°C)</p> <p>Model 4W3A: -40 to 158°F (-40 to 70°C)</p> <p>Full display visibility, all models: 10 to 158°F (-12 to 70°C)</p>  |
| <b>Long-term Stability:</b>                 | $\pm$ 0.25% of range/year maximum   |
| <b>Temperature drift:</b>                   | 0.03% of full scale per °C  |
| <b>Switch response time:</b>                | "Change-of-output" response $\leq$ 60 mS (16.7 Hz) (for detection of full step change and change of output state, delay feature off)  |
| <b>Display response time:</b>               | 400 mS (2.5 Hz)   |
| <b>Response time filtering:</b> (Delay)     | Software-configurable between 250 mS and 2 seconds in 2X increments   |
| <b>Diagnostics (IAW®):</b>                  | Open or shorted sensor; plugged port; power supply out of range; over and under-range conditions; microprocessor faults/failure; keypad short; switch fault   |
| <b>Output states:</b>                       | <p>Field selectable for 2-state or 3-state operation.</p> <p><u>For 2-state operation: (Default Setting)</u></p> <p>Output will remain in one state (open or close) during normal ("inside threshold") operation; change to the opposite state for "at and outside threshold" conditions. However, unit must be configured as normally closed (Open rise, Open fall) in order that a diagnostic or other failure will produce an open output state</p> <p><u>For 3-state operation:</u></p> <p>Output will remain in closed state during normal ("inside threshold") operation; change to open state to indicate a fault/failure; and change between closed and open (pulse) state during "at and outside threshold" conditions.</p> <p>Pulse rates vary by model. Fast and slow rates are selectable. See Table.</p> |
| <b>Control modes:</b>                       | Field configurable for change of state above or below set point value. Software configurable for automatic or manual reset  |
| <b>Analog output:</b>                       | 4-20 mA output, 700 ohms max. at 24 VDC, Field scalable, 2:1 turn down. Various faults are indicated at 0, 3.5, 22 and 24 MA  |

| Pulse Rate Table |        |        |      |
|------------------|--------|--------|------|
|                  | 2W2D   | 2W3A   | 8W2D |
|                  | 2WLP   | 4W3A   |      |
| FAST             | 25 mS  | 200 mS | N/A  |
| SLOW             | 100 mS | 500 mS | N/A  |

**Switch Output:**

| Model Number | SW1                                     | SW2                                | Minimum Load Requirements |
|--------------|---|------------------------------------|---------------------------|
| 2W2D00       | 12-30 VDC @ 40 mA                       | N/A                                | 2.30 mA                   |
| 2W3A00       | 90-130 VAC/VDC @ 100 mA                 | N/A                                | 3.75 mA                   |
| 2WLP41       | 0-140 VAC/VDC @ 0.6 A <sup>1</sup>      | N/A                                | 0 mA                      |
| 2WLP43       | 0-280 VAC/VDC @ 0.3A <sup>1</sup>       | N/A                                | 0 mA                      |
| 4W3A01       | 24-280 VAC @ 10 A (max. *) <sup>2</sup> | N/A                                | 150 mA                    |
| 8W2D42       | 75-250 VAC @ 1.5 A <sup>3</sup>         | 75-250 VAC @ 1.5 A <sup>3</sup>    | SW1 - 50 mA, SW2 - 50 mA  |
| 8W2D44       | 75-250 VAC @ 1.5 A <sup>3</sup>         | 0-140 VAC/VDC @ 0.6 A <sup>1</sup> | SW1 - 50 mA, SW2 - 0 mA   |
| 8W2D45       | 0-140 VAC/VDC @ 0.6 A <sup>1</sup>      | 0-140 VAC/VDC @ 0.6 A <sup>1</sup> | SW1 - 0 mA, SW2 - 0 mA    |

<sup>1</sup> Derate at 8% per 10°C (18°F) for temperatures above 21°C (70°F)

<sup>2</sup> Derate at 1.8 A per 10°C (18°F) for temperature above 38°C (100°F)

<sup>3</sup> Derate at 10% per 10°C (18°F) for temperatures above 21°C (70°F)

**Electrical characteristics:**  
(Models 2W2D & 2W3A only)

Model 2W2D Switch open: 12-30 VDC @ 750 µA maximum;  
switch closed: 4.7 VDC @ 40mA, max  
Model 2W3A Switch open: 90-130 VAC or VDC @ 1 mA maximum;  
switch closed: 13 VAC or VDC @ 100 mA, max

**Enclosure:**

Certified to Enclosure Type 4X/IP66, epoxy-coated aluminum

**Faceplate:**

UV-resistant polycarbonate with 2-button membrane switch and overlay

**Wiring terminations:**

Model 2W2D and 2W3A: terminal block with 3 screw connections (2 for switch, 1 for chassis ground)  
Model 2WLP: terminal block 1 with 3 screw connections (2 for switch, 1 for chassis ground), terminal block 2 with 2 screw connections for 4-20 mA loop  
Model 4W3A: terminal block with 4 screw connections (2 for ac switch, 2 for ac power)  
Model 8W2D: three terminal blocks (1 for DC power, 1 for 4-20 mA output and 1 for both SSR switches)

**Conduit:**

1/2" NPT (female), Dual ports (2) for Model 2WLP and 8W2D only

**Display:**

Local 4 digit x 0.5" LCD  
I Am Working (IAW®) status arrows  
Process Variable  
Units of measure  
Switch status  
Latch status  
Set point value  
Deadband value  
Min/Max values  
Fault codes

**Set point & deadband:**

User-configured, 100 % adjustable over entire sensor range

IAW® is a registered trademark of United Electric Controls Co.  
Specifications subject to change without notice

|  |   |
|--|---|
| <b>Memory:</b>                         | Programming and data protected by non-volatile EEPROM   |
| <b>Effective transmission distance</b> | 2,000 feet at rated voltage for 2W2D and 2W3A   |
| <b>Sensors:</b>                        | <p><b>Gauge Pressure</b> – 316 stainless steel, welded diaphragm, 1/2" NPT (female) process connection, micro-machined piezo-resistive strain gauge silicon element, 0.25 ml silicone oil fill.<br/>Media temperature: -40 to 257°F (-40 to 125°C)</p> <p><b>*Differential Pressure</b> - 316 stainless steel, welded diaphragms, 1/4" NPT (male) process connections, piezo-resistive strain gauge silicon element, silicone oil fill.<br/>Media temperature: -40 to 257°F (-40 to 125°C)</p> <p><b>Temperature</b> – 316 stainless steel 0.25" OD sheath containing a 100 ohm 4-wire platinum RTD element available with epoxy fill (local low temp) or powder fill (remote high temp).<br/>Media temperature: -300 to 1000°F (-184 to 538°C)</p> |
| <b>EMI/RFI:</b>                        | Compliance to CE EMC requirements: EN 55011, EN 61326, EN 61000-6-2   |
| <b>Emission:</b>                       | EN 55011 class A; Radiated emissions<br>EN 61000-3-2 Harmonic Current Emissions   |
| <b>Immunity:</b>                       | <p>EN 61000-3-3 Immunity to Voltage Fluctuations and Flicker</p> <p>EN 61000-4-2 Immunity to Electrostatic Discharge</p> <p>EN 61000-4-3 Immunity to Continuous Radiated Disturbances</p> <p>EN 61000-4-4 Immunity to Electrical Fast Transients</p> <p>EN 61000-4-5 Immunity to Surges</p> <p>EN 61000-4-6 Immunity to Continuous Conducted Disturbances</p> <p>EN 61000-4-8 Immunity to Power Frequency Magnetic Field</p> <p>EN 61000-4-11 Immunity to Voltage Dips and Interruptions</p>  |

\* Call for availability

## 2W & 8W APPROVALS & RATINGS



### **UNITED STATES AND CANADA**

#### **2W2D**

Class I, Division 1\* and 2, Groups A, B, C & D

Class II, Division 1\* and 2, Groups E, F & G

Class III

Class I, Zone 0, AEx ia IIC T5

Class I, Zone 0, Ex ia IIC T5

Enclosure Type 4X

\* Intrinsically safe when used with suitable barrier per drawing # A-62174-19. (I.S. Barrier available: Option M036)

#### **2W2D & 2W3A,**

Class I, Division 2, Groups A, B, C & D

Class II, Division 2, Groups F & G

Class III

Class I, Zone 2, AEx nC IIC T5

Class I, Zone 2, Ex nC IIC T5

Enclosure Type 4X

#### **2WLP**

Class I, Division 2, Groups A, B, C & D

Class II, Division 2, Groups F & G

Class III

Class I, Zone 2, AEx nC IIC T4

Class I, Zone 2, Ex nC IIC T4

Enclosure Type 4X

#### **8W2D**

Class I, Division 2, Groups A, B, C & D, T4A

Class II, Division 2, Groups F & G

Class III

Class I, Zone 2, AEx nC IIC T4A\*\*

Class I, Zone 2, Ex nC IIC T4A\*\*

Enclosure Type 4X

### **UL Listed, cUL Certified**

#### **2W2D, 2W3A, 2WLP & 8W2D**

Pressure & Temperature: UL 50, 508, 913, 1604 & 2279;

CSA No. E79-0, E79-11, E79-15, C22.2 No. 14, 157 & 213

- File # E226592

Certificate # DEMKO 03 ATEX 0322281X (2W2D & 2WLP)

EN 50014, 50020, 50021, 50284, 50281-1-1 & 60529

Certificate # DEMKO 03 ATEX 135585X (2W3A)

EN 50021, 50281-1-1 & 60529

### **Pressure Equipment Directive (PED) (97/23/EC)**

#### **Gauge pressure models only**

Category IV, Module H1 **(OPTIONAL – code M407)**

TÜV Industrie Service TÜV SÜD AG (N.B.# 0036)

Certificate # USA 02/04/38/001 thru USA 02/07/38/033

### **Electromagnetic Compatibility Directive (EMC)**

#### **(89/336/EEC, 92/31/EEC & 93/68/EEC)**

#### **2W2D**

UL International EMC Services

Certificate File # NC4525

EN 55011, 61000-4-2 thru 61000-4-6, 61000-4-8 &

61000-6-2

#### **2W3A, 2WLP & 8W2D**

Intertek ETL Entela

EN 55011, EN 61326



### **RUSSIA**

#### **2W2D, 2W3A, 2WLP & 8W2D**

Gosgortekhnadzor Permit **(OPTIONAL – code M406)**

2W2D - 0ExIaIIC T5

2W3A - ExnLIIC T5

2WLP & 8W2D - ExnLIIC T4

2W2D & 2W3A - Tamb = -40°C to +85°C

2WLP & 8W2D - Tamb = -40°C to +80°C

NANIO CCVE Certification Center

Certificate # RRS 00-22739

GOST R 51330.0, 51330.1, 51330.10 & 51330.14

## 4W APPROVALS & RATINGS



### **EUROPE**



### **ATEX Directive (94/9/EC)**

#### **2W2D**

II 1 G EEx ia IIC T5 **(OPTIONAL – code M419)**

II 1 D T+90°C

Tamb = -40°C to +85°C, IP 66

I.S. when installed per drawing # A-62174-20

#### **2W2D, 2W3A & 8W2D\*\***

II 3 G EEx nL IIC T5 **(OPTIONAL – code M419)**

II 3 D T+90°C

Tamb = -40°C to +85°C, IP 66

#### **2WLP\*\***

II 3 G EEx nL IIC T4 **(OPTIONAL – code M419)**

II 3 D T+130°C

Tamb = -40°C to +80°C, IP 66

UL International DEMKO A/S (N.B.# 0539)



### **UNITED STATES AND CANADA**

Class I, Division 2, Groups A, B, C & D

Class II, Division 2, Groups F & G

Class III

Class I, Zone 2, AEx nC IIC T4A

Class I, Zone 2, Ex nC IIC T4A

Enclosure Type 4X

### **UL Listed, cUL Certified**

Pressure & Temperature: UL 50, 913, 1604 & 2279;

CSA No. E79-0, E79-11, E79-15, C22.2 No. 14, 157 & 213

- File # E226592

**FMEDA** - Failure modes, effects and diagnostic analysis report is available upon request, providing necessary data to perform SIL calculations. All models included.

## HOW TO ORDER

**ONE SERIES ELECTRONIC SWITCH** User adjustable, digital indicating, 2-Wire and external power configurations. Build a part number by selecting appropriate code for each feature category. Example: **2W2D00P10-M276**

| 2W2D00                                  | P                          | 10                                | M276                          |
|---|----------------------------|-----------------------------------|-------------------------------|
| Electronic Switch<br>Model<br>12-30 VDC | Sensor<br>Type<br>Pressure | Range<br>Configuration<br>0-5 psi | Option<br>Codes<br>Units-mbar |

| MODEL  | DESCRIPTION  |
|--------|--|
| 2W2D00 | Discrete input powered, 12-30 VDC, 40 mA   |
| 2W3A00 | Discrete input powered, 90-130 VAC or VDC, 100 mA  |
| 2WLP41 | Loop-powered 4-20 mA output and 0-140 VAC or VDC, 0.6 A  |
| 2WLP43 | Loop-powered 4-20 mA output and 0-280 VAC or VDC, 0.3 A  |
| 4W3A01 | 90-130 VAC Power Input, 24-280 VAC, 10 A   |
| 8W2D42 | External powered by 10-30 VDC, two 75-250 VAC @ 1.5 A SSRs, 4-20 mA output                               |
| 8W2D44 | External powered by 10-30 VDC, one 75-250 VAC @ 1.5 A SSR, one 0-140 VAC/VDC @ 0.6 A SSR, 4-20 mA output |
| 8W2D45 | External powered by 10-30 VDC, two 0-140 VAC/VDC @ 0.6 A SSRs, 4-20 mA output                            |

| SENSOR TYPE | DESCRIPTION   |
|-------------|---|
| P           | Gauge Pressure, 316L stainless steel welded diaphragm, 1/2" NPT (female)      |
| K**         | Differential Pressure, 316L stainless steel welded diaphragm, 1/4" NPT (male) |
| T           | Temperature, 100 ohm RTD, 316 stainless steel sheath, 0.25" OD"               |

### SENSOR RANGE AND CONFIGURATION

| GAUGE PRESSURE | Ranges |            | Maximum Over Range* |                                 |
|----------------|--------|------------|---------------------|---------------------------------|
|                | psig   | (mbar)/bar | psig                | (mbar)/bar                      |
| 10             | 0-5    | (0-344,7)  | 10                  | (689) (see Option M275 for "wc) |
| 11             | 0-15   | (0-1034)   | 30                  | (2068)                          |
| 12             | 0-30   | (0-2068)   | 60                  | (4137)                          |
| 13             | 0-50   | (0-3447)   | 100                 | (6895)                          |
| 14             | 0-100  | (0-6895)   | 200                 | 13,8                            |
| 15             | 0-300  | 0-20,68    | 600                 | 41,4                            |
| 16             | 0-500  | 0-34,47    | 1000                | 68,9                            |
| 17             | 0-1000 | 0-68,95    | 2000                | 137,9                           |
| 18             | 0-3000 | 0-206,8    | 6000                | 413,7                           |
| 19             | 0-4500 | 0-310,3    | 9000                | 620,5                           |

| DIFFERENTIAL PRESSURE** | Ranges <sup>1</sup> |            | Over Range <sup>2</sup> |      | Working <sup>3</sup> |                               |
|-------------------------|---------------------|------------|-------------------------|------|----------------------|-------------------------------|
|                         | psid                | (mbar)/bar | psid                    | bar  | psig                 | bar                           |
| 10                      | 0-5                 | (0-344,7)  | 10                      | 0,69 | 50                   | 3,4 (see Option M275 for "wc) |
| 11                      | 0-50                | 0-3,4      | 100                     | 6,9  | 500                  | 34,5                          |
| 12                      | 0-100               | 0-6,9      | 200                     | 13,8 | 1000                 | 68,9                          |
| 13                      | 0-200               | 0-13,8     | 400                     | 27,6 | 1000                 | 68,9                          |

| RTD TEMPERATURE | Ranges                       | Description   |
|-----------------|------------------------------|---|
|                 | L1                           | -50 to 450°F (-45 to 232°C)   |
| L2              | -50 to 450°F (-45 to 232°C)  | Local mount sensor, 6" probe length   |
| L3              | -50 to 450°F (-45 to 232°C)  | Local mount sensor, 10" probe length  |
| R1              | -50 to 450°F (-45 to 232°C)  | Remote mount sensor, 6" probe length, 6' Teflon extension wire  |
| RC              | -50 to 450°F (-45 to 232°C)  | Remote mount sensor, 6" probe length, up to 30' Teflon extension wire   |
| H1              | -50 to 1000°F (-45 to 538°C) | Remote mount sensor, 2.5" probe length, 6' MI extension wire  |
| HC              | -50 to 1000°F (-45 to 538°C) | Remote mount sensor, 2.5" probe length, up to 30' MI extension wire (must specify length), 2W2D, 2WLP, and 8W2D models only |
| C1              | -300 to 200°F (-184 to 93°C) | Remote mount sensor, 2.5" probe length, 6' MI extension wire,   |
| CC              | -300 to 200°F (-184 to 93°C) | Remote mount sensor, 2.5" probe length, up to 30' MI extension wire (must specify length), 2W2D, 2WLP, and 8W2D models only |

\*Exceeding this value may damage the sensor \*\* Call for availability

## HOW TO ORDER CONTINUED

2W2D00 P 10 M276

### OPTION CODES

|      |  |
|------|--|
| HL1  | Hazardous location certificate   |
| M036 | Transformer isolated IS barrier (Use 62169-29 if ordered separately)   |
| M201 | Factory set parameters (set point, deadband, switch operating mode)<br>Must be specified when ordering per table on right: |
| M202 | Factory set parameters for two switches  |
| M270 | Display units, degrees C for temperature   |
| M275 | Display units, inches of water column (P10 & K10 only)   |
| M276 | Display units, bar or mbar   |
| M277 | Display units, kPa or MPa  |
| M278 | Display units, kg/cm <sup>2</sup>  |
| M406 | Compliance per Russian Gosgortekhnadzor  |
| M407 | PED CE category IV compliance (must order Option M419) Available on 2W & 8W, models P11-P19 only                           |
| M419 | ATEX approval (2W2D, 2W3A, 2WLP* and 8W2D* models only)  |
| M444 | Paper tag  |
| M446 | Stainless steel tag  |
| M550 | Oxygen cleaning service  |
| M905 | 1/2" NPT female conduit added to right wall of enclosure for 2W2D, 2W3A & 4W3A models only                                 |
| M906 | 1/2" NPT female conduit moved to bottom wall of enclosure for 2W2D, 2W3A & 4W3A models only                                |
| M907 | 1/2" NPT female conduit moved from right to top wall of enclosure for 2WLP & 8W2D models only                              |
| W073 | 1/2" NPT male compression fitting for use with all TL & TR sensors. See page 14.   |
| W074 | 1/2" NPT male union connector for use with all TH & TC sensors for 2W2D, 2WLP & 8W2D models only                           |
| W080 | 1/2" NPT male union connector for use with TH1 & TC1 sensors for 2W3A & 4W3A models only                                   |

| Option M201/M202 - Factory Set Parameters |                |             |           |          |
|---|----------------|-------------|-----------|----------|
| One Series Model Number                   | SW             | Switch Mode | Set Point | Deadband |
|   | 1              |             |           |          |
|   | 2 <sup>‡</sup> |             |           |          |

<sup>‡</sup> 8W2D models only

Differential Pressure Sensors (definitions)

1. **Ranges** are defined as the ranges of differential pressure between process inputs for which the sensors will operate within specified functional tolerances.
  2. **Over Range** is defined as the maximum difference in pressure between the process inputs. Exceeding this pressure differential at any working pressure may permanently damage the sensor.
  3. **Working Pressure** is defined as the maximum pressure at either process input. Exceeding this pressure at either process input individually or simultaneously may permanently damage the sensor.
- \* Pending Approvals


## ONE SERIES - POWER AND SWITCH OPTIONS

| Model                            | Power/Input Type  | Input Voltage Range | SPST Switch Rating (maximum)                             | Minimum Load Requirement |
|----------------------------------|---|---------------------|--|--------------------------|
| 2W2D00                           | 2-Wire PLC, DCS, PC discrete input or interposing relay coil      | 12-30 VDC           | 30 VDC @ 40 mA   | 2.30 mA                  |
| 2W3A00                           | 2-Wire PLC, DCS, PC discrete input or interposing relay coil      | 90-130 VAC/VDC      | 130 VAC/VDC @ 100 mA                                     | 3.75 mA                  |
| 2WLP41 (includes 4-20 mA output) | PLC, DCS, PC analog input (loop powered) or external power supply | 10-36 VDC           | 140 VAC/VDC @ 0.6 A                                      | 0 mA                     |
| 2WLP43 (includes 4-20 mA output) | PLC, DCS, PC analog input (loop powered) or external power supply | 10-36 VDC           | 280 VAC/VDC @ 0.3 A                                      | 0 mA                     |
| 4W3A01                           | External power supply   | 90-130 VAC          | 24-280 VAC @ 10 A  | 150 mA                   |
| 8W2D42 (includes 4-20 mA output) | External power supply   | 10-30 VDC           | SW1: 75-250 VAC @ 1.5 A<br>SW2: 75-250 VAC @ 1.5 A       | SW1: 50 mA<br>SW2: 50 mA |
| 8W2D44 (includes 4-20 mA output) | External power supply   | 10-30 VDC           | SW1: 75-250 VAC @ 1.5 A<br>SW2: 0-140 VAC/VDC @ 0.6 A    | SW1: 50 mA<br>SW2: 0 mA  |
| 8W2D45 (includes 4-20 mA output) | External power supply   | 10-30 VDC           | SW1: 0-140 VAC/VDC @ 0.6 A<br>SW2: 0-140 VAC/VDC @ 0.6 A | SW1: 0 mA<br>SW2: 0 mA   |

## DIMENSIONAL DRAWINGS


### 2W2D, 2W3A, 4W3A MODELS

(Single conduit shown with Gauge Pressure Sensor)

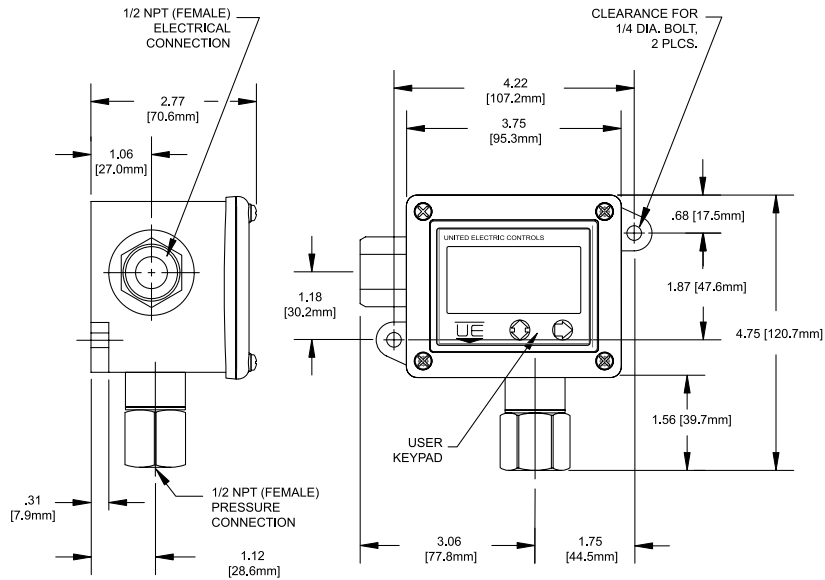


### 2WLP & 8W2D MODELS

(Dual conduit shown with Temperature Sensor)

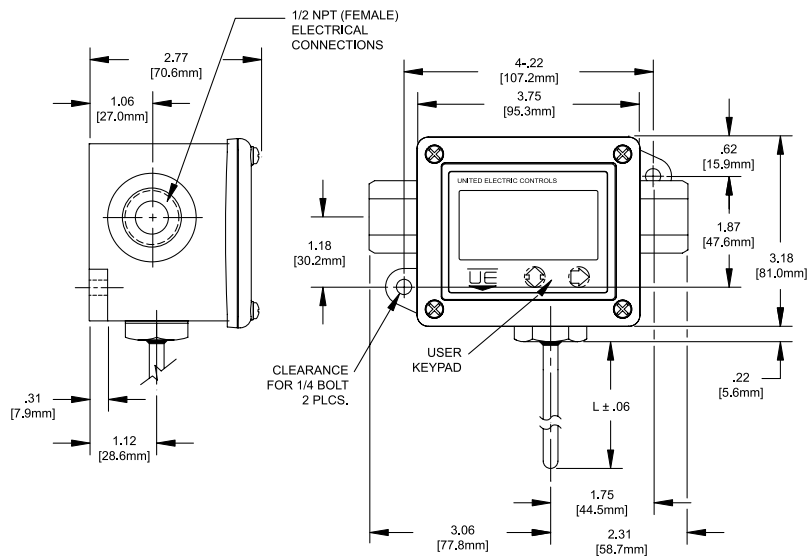

**SENSOR DETAILS**


**GAUGE PRESSURE**




**DIFFERENTIAL PRESSURE**

**SENSOR**


(Call for availability)

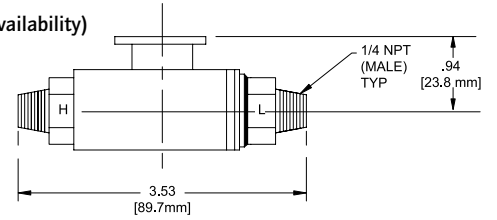


**LOCAL TEMPERATURE  
SENSOR (L1, L3)**




**HIGH TEMPERATURE  
REMOTE SENSOR  
(H1, HC)**

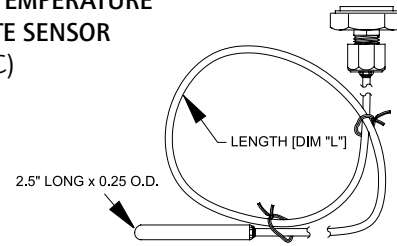

**LOW TEMPERATURE  
REMOTE SENSOR  
(R1, RC)**

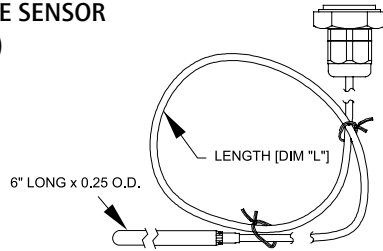

## THERMOWELLS FOR TEMPERATURE SENSORS

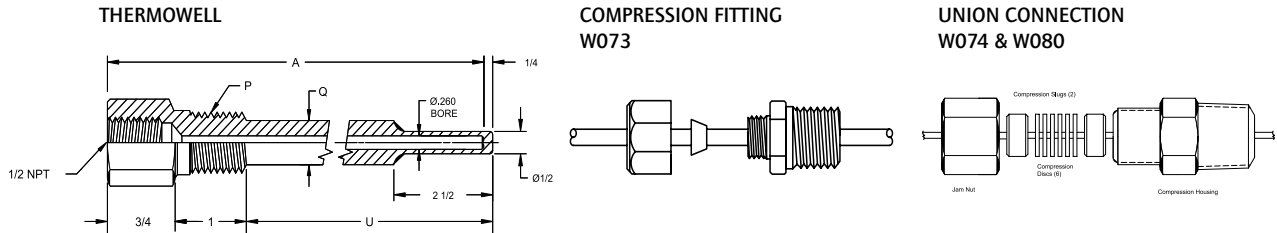

### THERMOWELLS AND FITTINGS FOR ONE SERIES TEMPERATURE SENSORS

| Thermowells (316L) |            |         |     |      | 1/2" NPT Compression Fitting<br>W073 |         |          | Union Connection<br>W074 & W080 |          |          |
|--------------------|------------|---------|-----|------|--------------------------------------|---------|----------|---------------------------------|----------|----------|
| Thermowell         | Length (A) | P (NPT) | Q   | U    | Local Sensor                         |         |          | Remote                          | Remote   |          |
| UE P/N             | Inches     |         |     |      | L1 (4")                              | L2 (6") | L3 (10") | R Sensor                        | R Sensor | H Sensor |
| 1S260 L4-316       | 4          | 1/2     | 5/8 | 2.5  | N/A                                  | 1       | 2        | 1                               | N/A      | 1        |
| 1S260 L5.5-316     | 5.5        | 1/2     | 5/8 | 4    | N/A                                  | N/A     | 2        | N/A                             | N/A      | 1        |
| 1S260 L6-316       | 6          | 1/2     | 5/8 | 4.5  | N/A                                  | N/A     | 2        | N/A                             | 1        | 1        |
| 1S260 L6.5-316     | 6.5        | 1/2     | 5/8 | 5    | N/A                                  | N/A     | 1        | N/A                             | 1        | 1        |
| 1S260 L9-316       | 9          | 1/2     | 5/8 | 7.5  | N/A                                  | N/A     | 2        | N/A                             | 1        | 1        |
| 1S260 L9.5-316     | 9.5        | 1/2     | 5/8 | 8    | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |
| 1S260 L12-316      | 12         | 1/2     | 5/8 | 10.5 | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |
| 1S260 L15-316      | 15         | 1/2     | 5/8 | 13.5 | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |
| 1S260 L18-316      | 18         | 1/2     | 5/8 | 16.5 | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |
| 1S260 L24-316      | 24         | 1/2     | 5/8 | 22.5 | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |
| 2S260 L4-316       | 4          | 3/4     | 3/4 | 2.5  | N/A                                  | 1       | 2        | 1                               | N/A      | 1        |
| 2S260 L6-316       | 6          | 3/4     | 3/4 | 4.5  | N/A                                  | N/A     | 1        | N/A                             | 1        | 1        |
| 2S260 L9-316       | 9          | 3/4     | 3/4 | 7.5  | N/A                                  | N/A     | 2        | N/A                             | 1        | 1        |
| 2S260 L12-316      | 12         | 3/4     | 3/4 | 10.5 | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |
| 2S260 L15-316      | 15         | 3/4     | 3/4 | 13.5 | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |
| 2S260 L18-316      | 18         | 3/4     | 3/4 | 16.5 | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |
| 2S260 L24-316      | 24         | 3/4     | 3/4 | 22.5 | N/A                                  | N/A     | N/A      | N/A                             | 1        | 1        |

NOTE: 1 Recommended fitting in order to bottom out the temperature sensor in the thermowell.  
 2 Can be used, but temperature sensor will not bottom out in longer thermowells, and the enclosure will need more support in shorter thermowells.  
 N/A Will not work with these thermowells.

## ONE SERIES DISPLAY RESOLUTION

| DISPLAY RESOLUTION |             | OPTIONS      |             |              |             |              |             |
|--------------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|
| Range Units        | Dec. Places | Option -M276 | Dec. Places | Option -M277 | Dec. Places | Option -M278 | Dec. Places |
| 0-5 psi*           | 2           | 344,7 mbar   | 1           | 34.47 kPa    | 2           | 0.352 kg/cm  | 3           |
| 0-15 psi           | 2           | 1034 mbar    | 0           | 103.4 kPa    | 1           | 1.055 kg/cm  | 3           |
| 0-30 psi           | 2           | 2068 mbar    | 0           | 206.8 kPa    | 1           | 2.109 kg/cm  | 3           |
| 0-50 psi           | 1           | 3447 mbar    | 0           | 344.7 kPa    | 1           | 3.516 kg/cm  | 3           |
| 0-100 psi          | 1           | 6895 mbar    | 0           | 689.5 kPa    | 1           | 7.031 kg/cm  | 3           |
| 0-300 psi          | 1           | 20,68 bar    | 2           | 2068 kPa     | 0           | 21.09 kg/cm  | 2           |
| 0-500 psi          | 1           | 34,47 bar    | 2           | 3447 kPa     | 0           | 35.16 kg/cm  | 2           |
| 0-1000 psi         | 0           | 68,95 bar    | 2           | 6895 kPa     | 0           | 70.31 kg/cm  | 2           |
| 0-3000 psi         | 0           | 206,8 bar    | 1           | 20.68 MPa    | 2           | 210.9 kg/cm  | 1           |
| 0-4500 psi         | 0           | 310,3 bar    | 1           | 31.03 MPa    | 2           | 316.4 kg/cm  | 1           |

\* Option M275 - Dec. Places 1, 138.4 "wc

## ALTERNATIVE PRODUCTS FROM UE


### Spectra 12 Series

- Compact, cylindrical stainless steel design
- Hermetically sealed switch
- Explosion Proof
- Snap-acting belleville spring mechanism to enhance vibration resistance and set point stability
- Pressure ranges 1 to 6,000 psi;  
DP working pressure ranges 0 to 2500 psid;  
temperature ranges -130 to 650°F



### 120 Series

- Explosion-proof line of pressure, differential pressure, and temperature models with wide selection of ranges, sensors and pressure connections
- UL, cUL, ATEX certified for hazardous locations
- Single or dual switch outputs
- Internal or external set point adjustment




### TX200 Series Pressure Transmitters

- Welded, hermetically sealed, 316 Stainless steel construction
- Ranges 0 to 100 psi up to 0 to 25,000 psi
- Choice of field adjustable or fixed range models
- 4-20 mA or 1-5 VDC output



### 117 Series

- Single Switch for Corrosive and Hazardous Division 2 Locations
- Compact pressure, differential pressure and temperature models
- Hermetically-sealed SPDT and DPDT output
- Epoxy-coated weather-tight design houses stainless steel internal construction
- Convenient terminal block wiring



### Temperature Sensors

Rugged RTD's and Thermocouples for process and energy applications, available with Nema 4X and explosion-proof heads to match heat-trace, turbine, combustion, and stack-emission applications



## RECOMMENDED PRACTICES AND WARNINGS

United Electric Controls Company recommends careful consideration of the following factors when specifying and installing UE pressure and temperature units. Before installing a unit, the Installation and Maintenance instructions provided with unit must be read and understood.

- To avoid damaging unit, proof pressure and maximum temperature limits stated in literature and on nameplates must never be exceeded, even by surges in the system. Operation of the unit up to maximum pressure or temperature is acceptable on a limited basis (e.g., start-up, testing) but continuous operation must be restricted to the designated adjustable range. Excessive cycling at maximum pressure or temperature limits could reduce sensor life.
- A back-up unit is necessary for applications where damage to a primary unit could endanger life, limb or property. A high or low limit switch is necessary for applications where a dangerous runaway condition could result.
- The adjustable range must be selected so that incorrect, inadvertent or malicious setting at any range point cannot result in an unsafe system condition.
- Install unit where shock, vibration and ambient temperature fluctuations will not damage unit or affect operation. When applicable, orient unit so that moisture does not enter the enclosure via the electrical connection. When appropriate, this entry point should be sealed to prevent moisture entry.
- Unit must not be altered or modified after shipment. Consult UE if modification is necessary.
- Monitor operation to observe warning signs of possible damage to unit, such as drift in set point or faulty display. Check unit immediately.
- Preventative maintenance and periodic testing is necessary for critical applications where damage could endanger property or personnel.
- Electrical ratings stated in literature and on nameplate must not be exceeded. Overload on a switch can cause damage, even on the first cycle. Wire unit according to local and national electrical codes, using wire size recommended in installation sheet.
- Do not mount unit in ambient temp. exceeding published limits.

## LIMITED WARRANTY

Seller warrants that the product hereby purchased is, upon delivery, free from defects in material and workmanship and that any such product which is found to be defective in such workmanship or material will be repaired or replaced by Seller (Ex-works, Factory, Watertown, Massachusetts. INCOTERMS); provided, however, that this warranty applies only to equipment found to be so defective within a period of 36 months from the date of manufacture by the Seller. Seller shall not be obligated under this warranty for alleged defects which examination discloses are due to tampering, misuse, neglect, improper storage, and in any case where products are disassembled by anyone other than authorized Seller's representatives. EXCEPT FOR THE LIMITED WARRANTY OF REPAIR AND REPLACEMENT STATED ABOVE, SELLER DISCLAIMS ALL WARRANTIES WHATSOEVER WITH RESPECT TO THE PRODUCT, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

## LIMITATION OF SELLER'S LIABILITY

SELLER'S LIABILITY TO BUYER FOR ANY LOSS OR CLAIM, INCLUDING LIABILITY INCURRED IN CONNECTION WITH (I) BREACH OF ANY WARRANTY WHATSOEVER, EXPRESSED OR IMPLIED, (II) A BREACH OF CONTRACT, (III) A NEGLIGENT ACT OR ACTS (OR NEGLIGENT FAILURE TO ACT) COMMITTED BY SELLER, OR (IV) AN ACT FOR WHICH STRICT LIABILITY WILL BE INPUTTED TO SELLER, IS LIMITED TO THE "LIMITED WARRANTY" OF REPAIR AND/OR REPLACEMENT AS SO STATED IN OUR WARRANTY OF PRODUCT. IN NO EVENT SHALL THE SELLER BE LIABLE FOR ANY SPECIAL, INDIRECT, CONSEQUENTIAL OR OTHER DAMAGES OF A LIKE GENERAL NATURE, INCLUDING, WITHOUT LIMITATION, LOSS OF PROFITS OR PRODUCTION, OR LOSS OR EXPENSES OF ANY NATURE INCURRED BY THE BUYER OR ANY THIRD PARTY.

*UE specifications subject to change without notice.*

## U.S. SALES OFFICES

United Electric Controls  
31 Old Stage Road  
Hampton Falls, NH 03844  
Phone: 617-899-1132  
email: [northeastsales@ueonline.com](mailto:northeastsales@ueonline.com)

United Electric Controls  
28 N. Wise Ave.  
Freeport, IL 61032  
Phone: 815-341-2588  
email: [midwestsales@ueonline.com](mailto:midwestsales@ueonline.com)

United Electric Controls  
1022 Vineyard Drive  
Conyers, GA 30013  
Phone: 770-335-9802  
email: [southeastsales@ueonline.com](mailto:southeastsales@ueonline.com)

United Electric Controls  
5829 Grazing Court  
Mason, OH 45040  
Phone: 513-535-5486  
email: [midatlanticsales@ueonline.com](mailto:midatlanticsales@ueonline.com)

United Electric Controls  
102 Salazar Court  
Clayton, CA 94517  
Phone: 925-408-5997  
email: [westcoastsales@ueonline.com](mailto:westcoastsales@ueonline.com)

United Electric Controls  
27 Summit Terrace  
Sparta, NJ 07871  
Phone: 973-271-2550  
email: [easternsales@ueonline.com](mailto:easternsales@ueonline.com)

United Electric Controls  
4306 Whickham Drive  
Fulshear, TX 77441  
Phone: 832-457-6138  
email: [southwestsales@ueonline.com](mailto:southwestsales@ueonline.com)

United Electric Controls  
5201 Arbor Court  
Odessa, TX 79762  
Phone: 432-770-4164  
email: [westtexasales@ueonline.com](mailto:westtexasales@ueonline.com)

## CANADA

EASTERN  
68 Mosley Crescent  
Brampton, Ontario  
Canada L6Y 5C8  
Phone: 905-455-5131  
FAX: 905-455-5131

WESTERN  
148 Silver Ridge Close N.W.  
Calgary, Alberta  
Canada T3B 3T4  
Phone: 403-247-3724  
FAX: 403-247-3724



UNITED ELECTRIC  
CONTROLS

180 Dexter Avenue, P.O. Box 9143  
Watertown, MA 02471-9143 USA  
Telephone: 617 926-1000 Fax: 617 926-2568  
<http://www.ueonline.com>

## INTERNATIONAL OFFICES

CHINA  
United Electric Controls, *Shanghai Office*  
Room 1011, 10th Flr,  
Huai Hai Zhonghua Building  
No. 885, Renmin Road, Luwan District  
Shanghai 200010, P.R. China  
Phone: +8621-6255 8059  
email: [chinasales@ueonline.com](mailto:chinasales@ueonline.com)

United Electric Controls, *Beijing Office*  
Room 1006, Jainhao International Bldg.  
Block D, No. 116  
Zizhuyuanlu, Haidian District  
Beijing, China 100089  
Phone & Fax: +86-10-5893-0551  
email: [beijingsales@ueonline.com](mailto:beijingsales@ueonline.com)

EASTERN EUROPE & SCANDINAVIA  
United Electric Controls  
05-806 Komorow  
Kujawska 5, Poland  
Phone: +48 22 499 4804  
email: [easterneuropesales@ueonline.com](mailto:easterneuropesales@ueonline.com)

GERMANY  
United Electric Controls  
An Der Zentlinde 21  
D-64711 Erbach, Germany  
Phone: 496-062-7400  
email: [europesales@ueonline.com](mailto:europesales@ueonline.com)

INDIA  
United Electric Controls  
House no. 7, Kamalkunj Society  
Nizampura,  
Baraoda (Gujarat), India  
Phone: +91 (-265) -2788654  
email: [indiasales@ueonline.com](mailto:indiasales@ueonline.com)

ASIA-PACIFIC  
United Electric Controls, Far East  
No. 1-2-2, 2nd Floor  
Jalan 4/101 C  
Cheras Business Centre  
Batu 5, Jalan Cheras  
56100 Kuala Lumpur, Malaysia  
Phone: 603-9133-4122  
email: [fareastsales@ueonline.com](mailto:fareastsales@ueonline.com)

MEXICO  
United Electric Controls  
Andador Austria 102  
Fracc. Petroquimica CP 89365  
Tampico, Tamaulipas Mexico  
Phone: 833-132-3726  
email: [latinamericasales@ueonline.com](mailto:latinamericasales@ueonline.com)

RUSSIA  
United Electric Controls, Moscow  
Kuusinena str., 19A, Office 310  
Moscow, 125252, Russia  
Phone: +7 (095) 792-88-06  
email: [russiansales@ueonline.com](mailto:russiansales@ueonline.com)

SP307053500